


CAJA PRECONECTORIZADA DE 16 PUERTOS



PRODUCT INFORMATION

H33 provides efficient cable connections between outside feeder cable and drop cable in front of FTTH service subscribers. H33 integrates fiber splicing, storage, cable connections and branch to the subscriber line in the closure. It has separated parts as splicing part and connection part. The reason of why H33 supports individual two parts, in case of subscriber line connection, can connect drop cables with feeder cable line without contact splicing part.

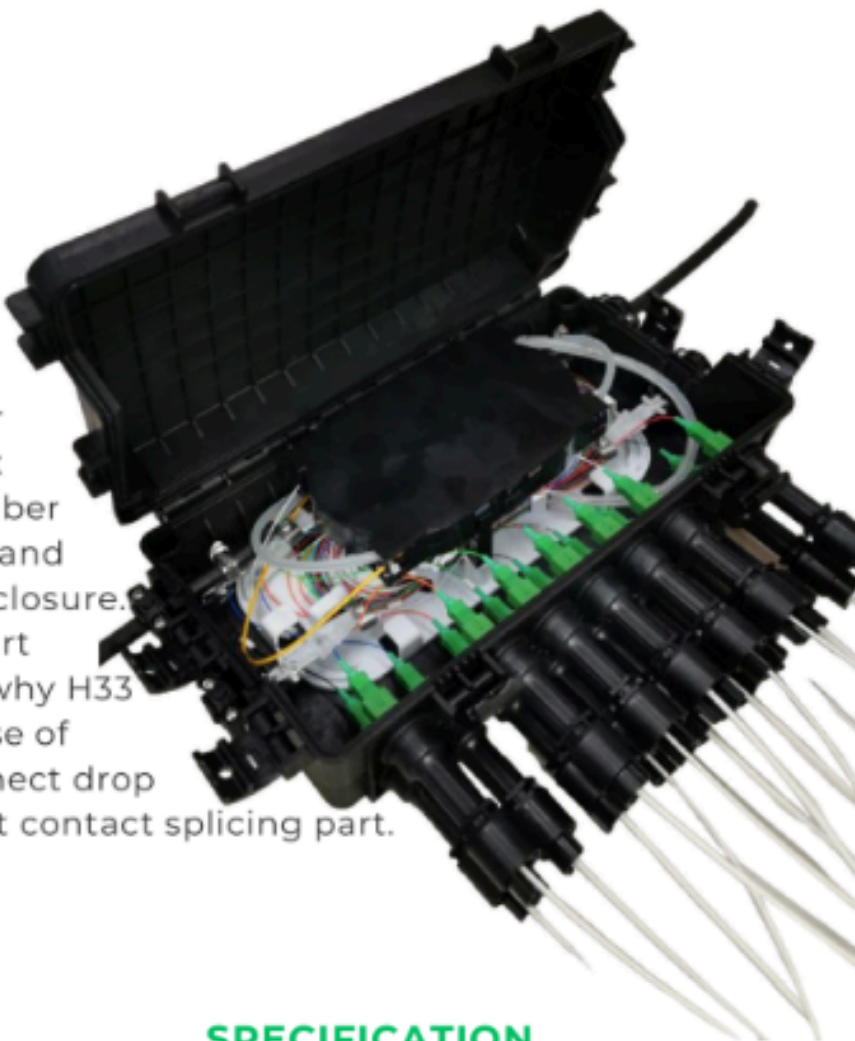

SPECIFICATION

Parameter			
General	Size (WxDxH)	323x195x120mm	
	Installation	Aerial, wall & Pole mounting	Applicable temperature: -40°C~+90°C
	Protection Grade	IP 66	
Ports	Cable Entry	Main + Distribution: 2+2 Drop(or Patch): 16	
	Cable diameter (mm)	Main + Distribution: Φ 6~25 Drop(or Patch): 3mm	
Capacity	Capacity of core	48 core	
Splice tray	2 trays	Max. 24 fibers/ tray	Fiber radius of curvature: ≥37.5mm
Adaptor	18 sets SC adapters max.		
Splitter	1 set 1:16 splitter or 1 sets 1:8 splitter or 1 sets 1:4 splitter		

